


FRONT VIEW

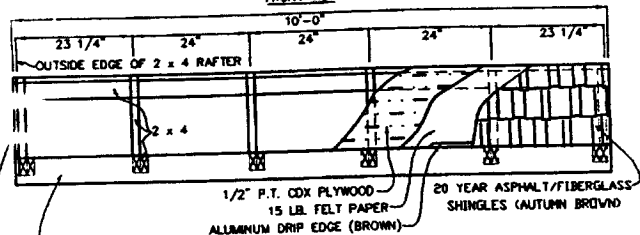


1 x 6 P.T. FASCIA BOARD (CONTINUOUS, NO JOINTS, BEVEL TOP EDGE TO MATCH ROOF PITCH). ENDNAIL WITH TWO (2)-8d NAILS TO EACH 2 x 4 RAFTER TAIL.

1 x 6 P.T. RAKE FASCIA BOARD (CONTINUOUS, NO JOINTS) FACE NAIL WITH 8d NAILS @ 6" O.C. TO 2 x 4 RAFTERS ON GABLE ENDS.


NOTES:

- ALL NAILS SHALL BE HOT DIPPED ZINC COATED (GALVANIZED) RING SHANK OR SPIRAL NAILS.
- ALL LUMBER AND PLYWOOD SHALL BE PRESSURE TREATED (P.T.) WITH CHROMATED COPPER ARSENATE (CCA) AND SHALL HAVE A MINIMUM RETENTION OF 0.4 LBS. OF CCA PER CUBIC FOOT (PCF).
- ALL LUMBER SHALL BE SOUTHERN YELLOW PINE, NO. 2 GRADE OR BETTER.
- ALL LUMBER SHALL BE SURFACED ALL FOUR SIDES (DRESSED). ALL LUMBER DIMENSIONS SHOWN ARE NOMINAL SIZES.

PLAN VIEW

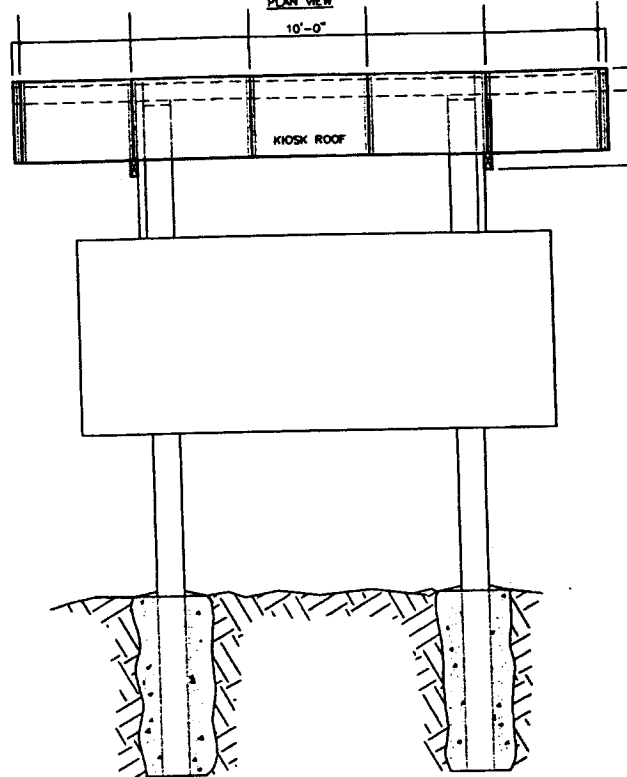

SIDE VIEW

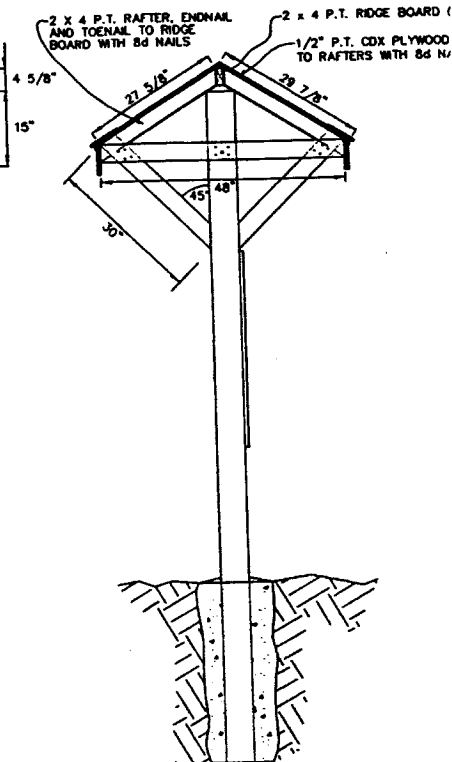

PLOT SCALE: 1:1